



Technology of refining aluminium alloys by reagent RF-1

The use of the reagent on the base of fluoropolymer for refining aluminium and its alloys gives possibility to decrease the content of hydrogen by 60-70% and ensures the removal of oxide inclusions by 40-60% in comparison with their initial composition.




The concentration of vapours of acids above the surface of a melt under treatment is 3-4 times less in comparison with traditional technologies.

The introduction of the reagent into a melt is implemented in the medium of an inert gas.

The composition of the reagent - 0,2 g per 1 kg of a melt.

The reagent is supplied to customers in the form of tablets of different weight.

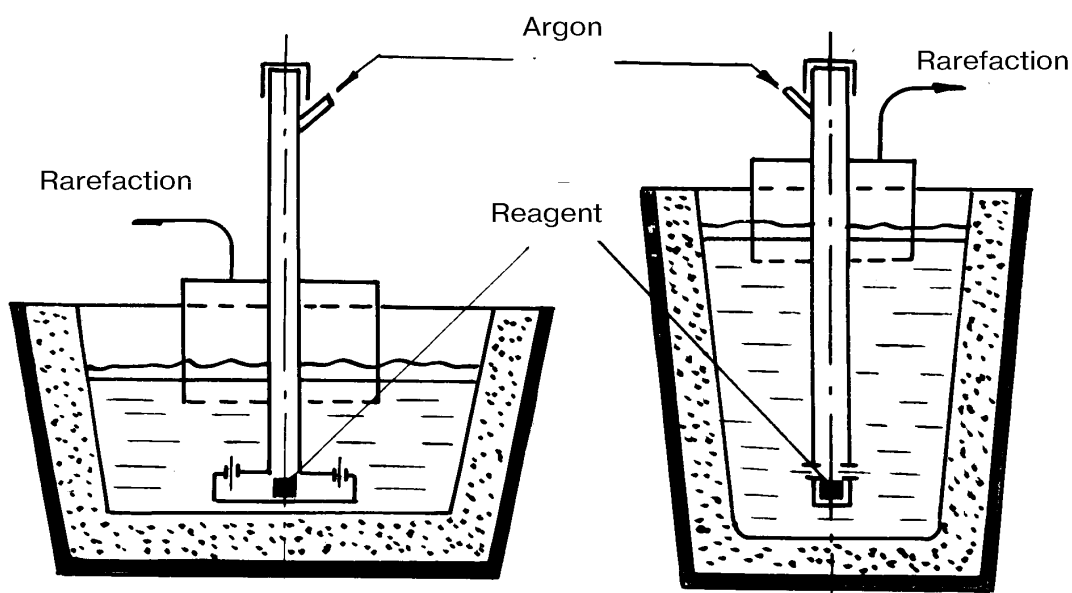

Please forward your proposals and suggestions to:

34/1 Vernadsky Avenue, 03680, Kiev-142, Ukraine, Physico-Technological Institute of Metals and Alloys of the National Academy of Sciences of Ukraine. Tel. (044) 444-35-15. Fax (044) 459-50-29. E-mail: metal@otima.kiev.ua